

# ZYXEL



## LTE5366-M608

### 4G LTE-A Indoor IAD

The Zyxel LTE5366-M608 4G LTE-A Indoor IAD provides users with mobile broadband connectivity to take advantage of the latest carrier aggregation technology compatible with LTE, DC-HSPA+/HSPA/UMTS and EDGE/GPRS/GSM that allows users to connect with a variety of mobile broadband services all over the world. You can enjoy Triple-Play services, watch IPTV and listen to high-fidelity music and easily surf the Internet at home, in the office or anywhere within LTE/3G coverage without wire limitation.

### Benefits

#### Lightning-fast Internet connectivity

The Zyxel LTE5366-M608 is a pioneering portable router with LTE category 6 compliance. The carrier aggregation technology delivers downlink data rates of up to 300 Mbps — twice which of the category 4 and is better than the fixed-line Ethernet — thanks to the modern technology, you can enjoy lightning-fast Internet now.



Fast 4G LTE-A connections for downlink speeds of up to 300 Mbps



Backward compatible with LTE/3G/2G networks



Dual-band, dual concurrent WiFi with 802.11ac 4x4 and 802.11n 2x2



Supports 2-band downlink carrier aggregation



CS voice/VoLTE



Supports MU-MIMO

## AC2050 MU-MIMO dual-band wireless LAN

The Zyxel LTE5366-M608's latest MU-MIMO 802.11ac technology is perfect for busy environments: it doubles WiFi performance of Single User MIMO (SU-MIMO) in venues where concurrent wireless access activities are intensive.


### MU-MIMO



LTE5366-M608

Transfer at the same time


### SU-MIMO

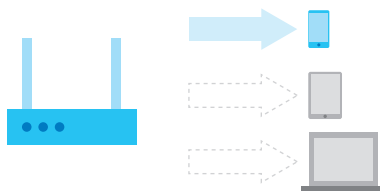


Transfer one by one

## Non-stop connectivity with LTE 2nd WAN for fail-over


Multi-WAN fail-over relieves the risk of network outage caused by dependence on single-WAN technology. Even better, LTE is wireless so you can get the second WAN without an additional cabling plan. As long as the gateway supports "multi-WAN fail-over", you can just connect the Zyxel LTE5366 to the existing gateway and set LTE as the fail-over WAN.

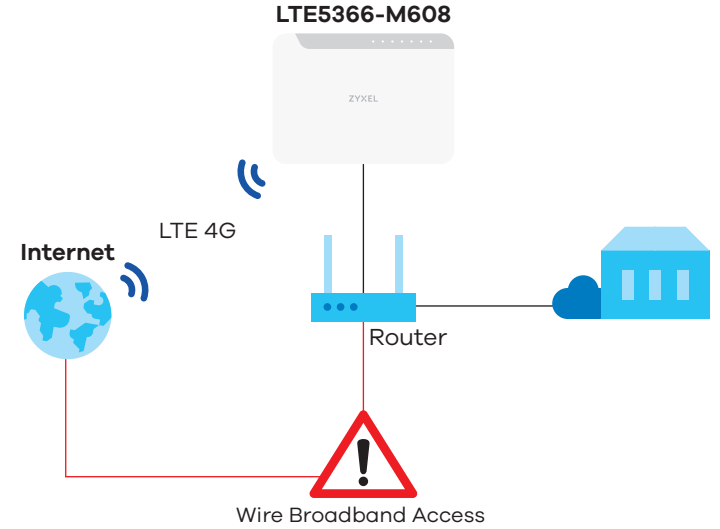

## Front Panel

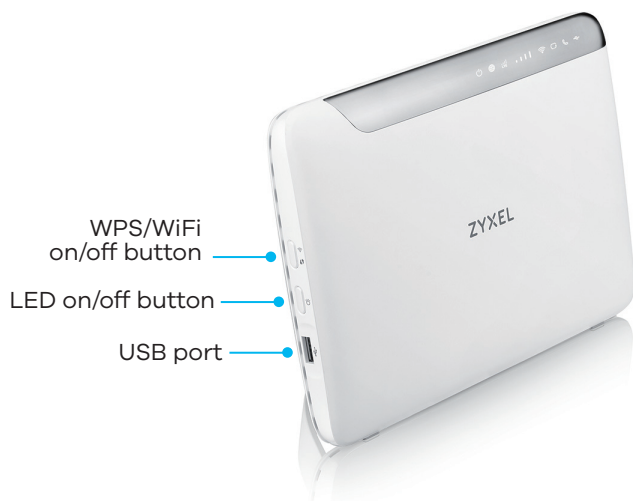

## Rear Panel

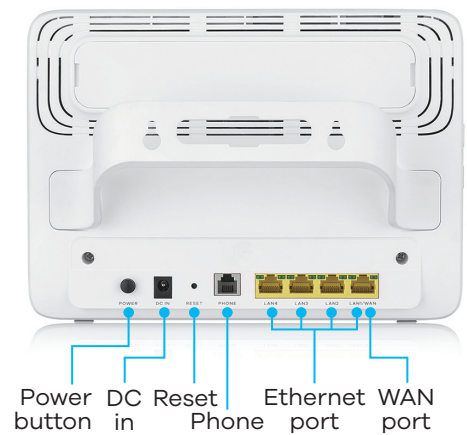

# Specifications

## System Specifications

### IP Networking

- Support IPv4 and IPv6 dual stack
- Multiple APNs
- DHCP client/server/relay
- PPTP/L2TP/IPSec VPN pass through
- VPN clients
- IP firewall
- Router mode/Bridge mode (IP pass-through)
- NAT/NAPT/NAT disabling
- DNS, DDNS

### WLAN Feature

- Auto channel selection
- WiFi Protected Setup (WPS)
- WiFi Multimedia (WMM)
- Security: None, WEP Personal, WPA2-Personal, WPA+WPA2
- MAC address filtering with 64 address supported
- Multiple SSIDs/Hide SSIDs
- WLAN scheduling

### Voice Service

- CS-Voice:
  - Standard compliant: 3GPP TS 23.272 Release 9
  - Support CSFB from LTE to 3G
- Voice over LTE:
  - GPP/GSMA IR.92 compliant
  - Supports Audio CODEC: G.711 (U-law), AMR, AMR-WB, EVRC
  - DTMF over RTP
  - Voice Activity Detection (VAD)
  - Comfort Noise Generation (CNG)

### System Management

- APN management
- SIM PIN management
- SMS management
- Secure remote management via WebGUI
- TR-069
- Over-The-Air (OTA) firmware upgrade: TR-069/WebGUI
- Dual firmware with fallback option
- Multiple configurations

## Hardware Specifications

### LTE Air Interface

- Standard compliant: 3GPP Release 10 category 6
- Supported frequency:
  - LTE FDD 2600/2100/1800/900/850/800 MHz (band 1/3/7/8/20)
  - LTE TDD 2600/2300 MHz (band 38/40)
- Carrier aggregation support: B1+B1/B1+B3/B1+B7/B1+B8/B1+B20/B3+B3/B3+B7/B3+B8/B3+B20/B7+B7/B7+B8/B7+B20/B38+B38/B40+B40
- LTE Antenna: 2 internal antennas
- FDD LTE Peak data rate:
  - 300 Mbps DL within 40 MHz bandwidth (CA)
  - 50 Mbps UL within 20 MHz bandwidth
- TDD LTE Peak data rate:
  - 224 Mbps DL within 40 MHz bandwidth (CA)
  - 10 Mbps UL within 20 MHz bandwidth

### UMTS/EDGE/GPRS/GSM Air Interface

- Standard compliant: DC-HSDPA/HSPA+ compliant
- Supported frequency:
  - HSPA+/UMTS 2100/900 MHz (band 1/8)
  - EDGE/GPRS/GSM 1900/1800/900/850 MHz (band 2/3/5/8)
  - DC-HSPA+ downlink data rate up to 42 Mbps
  - HSUPA uplink data rate up to 5.76 Mbps
  - UMTS data rate up to 384 kbps
  - EDGE data rate up to 236.8 kbps
  - GPRS data rate up to 85.6 kbps

### WiFi Air Interface

- Wireless standard:
  - IEEE 802.11 b/g/n, 2.4 GHz
  - IEEE 802.11 a/n/ac, 5 GHz
- Wireless speed:
  - 300 Mbps\* for 2.4 GHz
  - 1733 Mbps\* for 5 GHz
- WiFi 2.4 GHz antenna: 2x2 internal antennas
- WiFi 5 GHz antenna: 4x4 internal antennas

### Hardware Interface

- Four 10/100/1000 Mbps Ethernet RJ-45 LAN ports, LAN1 can be configured for Ethernet WAN port
- LEDs: Power indication, LTE connection status, LTE signal status, WiFi connection status, FXS status USB host status
- Two external LTE/3G/2G antenna ports (SMA-Female)
- One 2FF format/Mini SIM card slot
- One Power on/off button
- One WPS/WiFi on/off button
- One LED on/off button
- One reset button
- One FXS POTS phone ports for conventional phone (RJ-11 plug)
- One USB 2.0 Host port for file sharing

## Physical Specifications

- Dimensions (WxDxH): 230 x 160 x 30 mm

## Environmental Specifications

### Operating Environment

- Temperature: 0°C to 40°C (32°F to 104°F)
- Humidity: 10% to 90% (Non-condensing)

### Storage Environment


- Temperature: -30°C to 70°C (-22°F to 158°F)
- Humidity: 0% to 95% (Non-condensing)

## Power Specification

- External power supply: 110 to 240V AC/12V DC adaptor
- Power consumption at peak: < 20W

\* The maximum wireless data transfer rate is derived from IEEE Standard 802.11 specifications. Actual data transfer rate will vary from network environment including: distance, network traffic, building site materials/construction, interference from other wireless devices, and other adverse conditions.

# Application Diagram

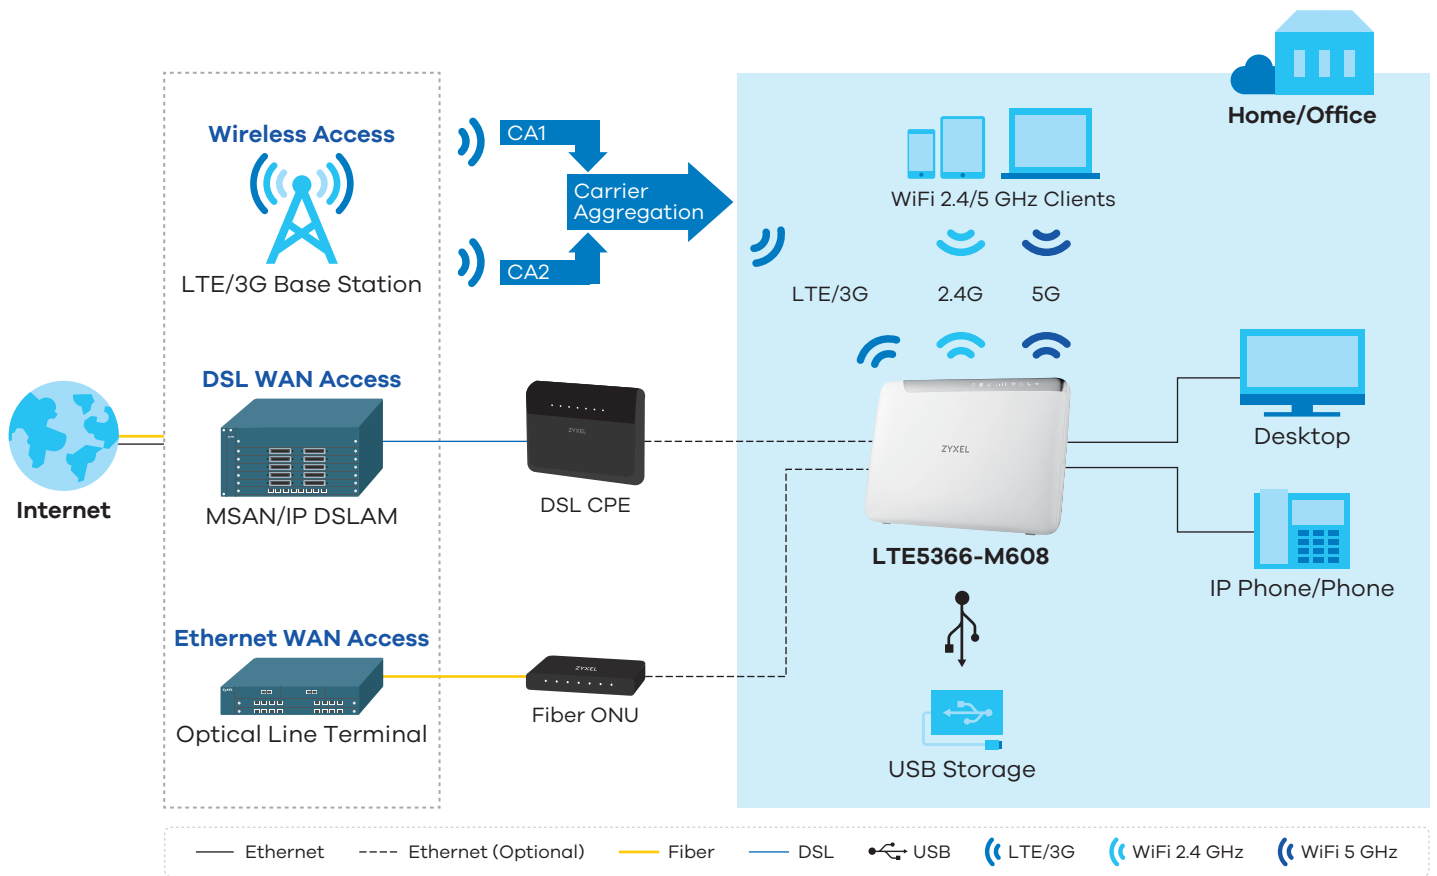

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2017 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet [LTE5366-M608](#)

